


Pivot Door

Installation / Maintenance Instructions

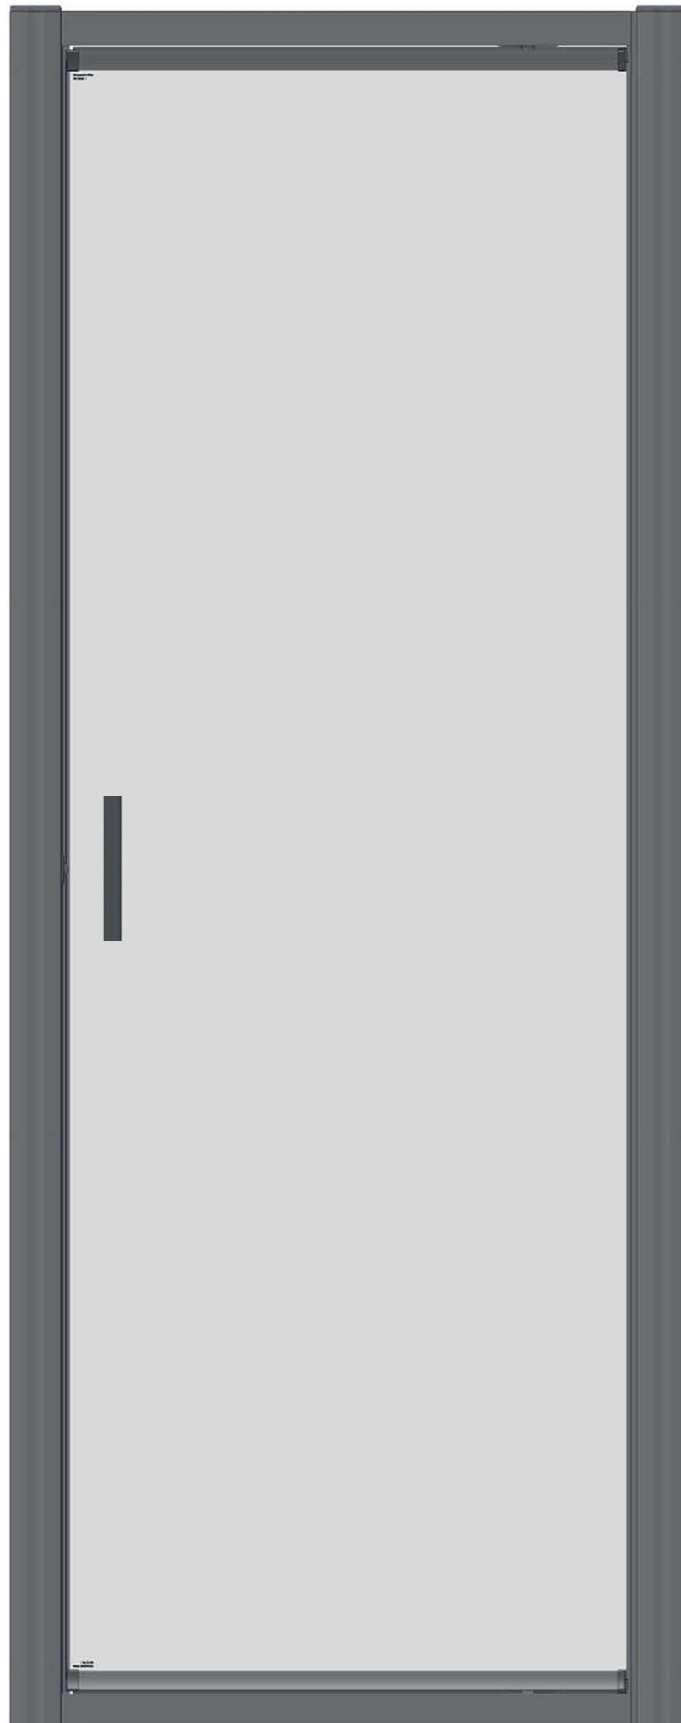

Rev 01.23

IMPORTANT NOTES :

Please Read Carefully & retain these instructions for Future Reference.

1. For ease & safety we advise that two persons assemble this product.
2. Protect shower tray surfaces at all times.
3. Exposed glass corners / edges MUST NOT contact hard surfaces at any time.
4. Check for cables, pipes etc before drilling walls.
5. Ensure all surfaces are dry, clean & free of loose debris / dust.
6. Unpack goods with care (small parts can become lodged in packaging & inadvertently discarded). Check parts supplied against parts & fittings listed herein. Damaged parts / omissions may be resolved by calling Helpline.
7. Whilst precautions are taken in manufacture, care must be taken when handling as rail ends may have sharp edges.
8. Before commencing, check :
 - a) shower tray (or base) is level & completely sealed to finished / tiled walls.
 - b) finished walls are sound & free of cracks, loose tiles / grout.
9. AFTER INSTALLATION, DO NOT 'WET' ENCLOSURE FOR 48 HOURS TO ENSURE FULL CURE OF SILICONE SEALANT.

USE: General Care & Maintenance.

Provided this product is installed & operated in accordance with these instructions, problems should not arise. However should maintenance be required it should be carried out by a competent person with reference to these instructions. Before any work is carried out the root cause of the problem must be identified. Service engineers are available if necessary to consult / carry out remedial work. Call HELPLINE.

Cleaning.

(Every one to two weeks depending on local water {hardness} conditions).

All glass panels in this product have a hydrophobic coating aiding 'runoff' of water droplets, reducing the need for frequent cleaning. For best appearance / product life however, regular cleaning is recommended.

Use ONLY mild soap / detergent solutions to clean. Rinse with water, squeegee glass panels & wipe frames dry with a soft cloth. Under no circumstances should abrasive, caustic or scouring products be used. Non compliance with these cleaning instructions may cause decorative finishes to deteriorate & could adversely affect safe operation of the enclosure. Limescale ~ should a build up of limescale occur, remove using a 50:50 solution of white vinegar & water applied with a soft cloth & rinsed / dried thoroughly afterwards.

Daily Care.

To prevent the build up of limescale, do not allow water droplets to dry on glass or frames. After showering, rinse with water, remove droplets from glass with a squeegee & wipe frame with a soft cloth.

Customer Service.



Quality Guarantee : We guarantee Shower Doors & Enclosures against any manufacturing or material defects for the duration of the warranty. We will resolve defects free of charge by repairing / replacing parts as we feel necessary. To be 'free of charge' service work must be carried out by approved agents.

Not Covered by this Guarantee : Damage or defects that result from improper installation, improper use, or lack of maintenance (including limescale buildup). Damage or defects that result from repairs / modifications undertaken by unauthorized persons. This guarantee is in addition to statutory & other legal rights.


What to do if something goes wrong : Should the product not function correctly on initial use, firstly, contact the installer to check that unit installation & commissioning are in accordance with these instructions. Should this not resolve difficulties or should performance decline, consult 'Troubleshooting' section to see if simple home maintenance is needed. Alternatively our HELPLINE staff can assist, or if necessary arrange for a service engineer to visit.

Spares : We maintain extensive spare part stocks. Spares can be ordered / purchased from your retailer in the first instance. Parts will normally be dispatched within two working days from order placement.


SUPPLIED PARTS :

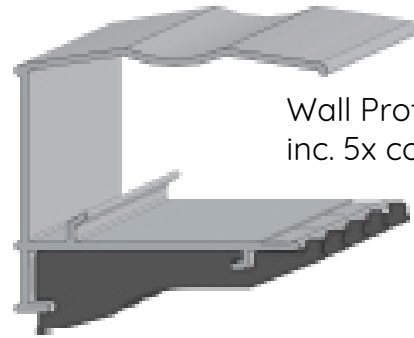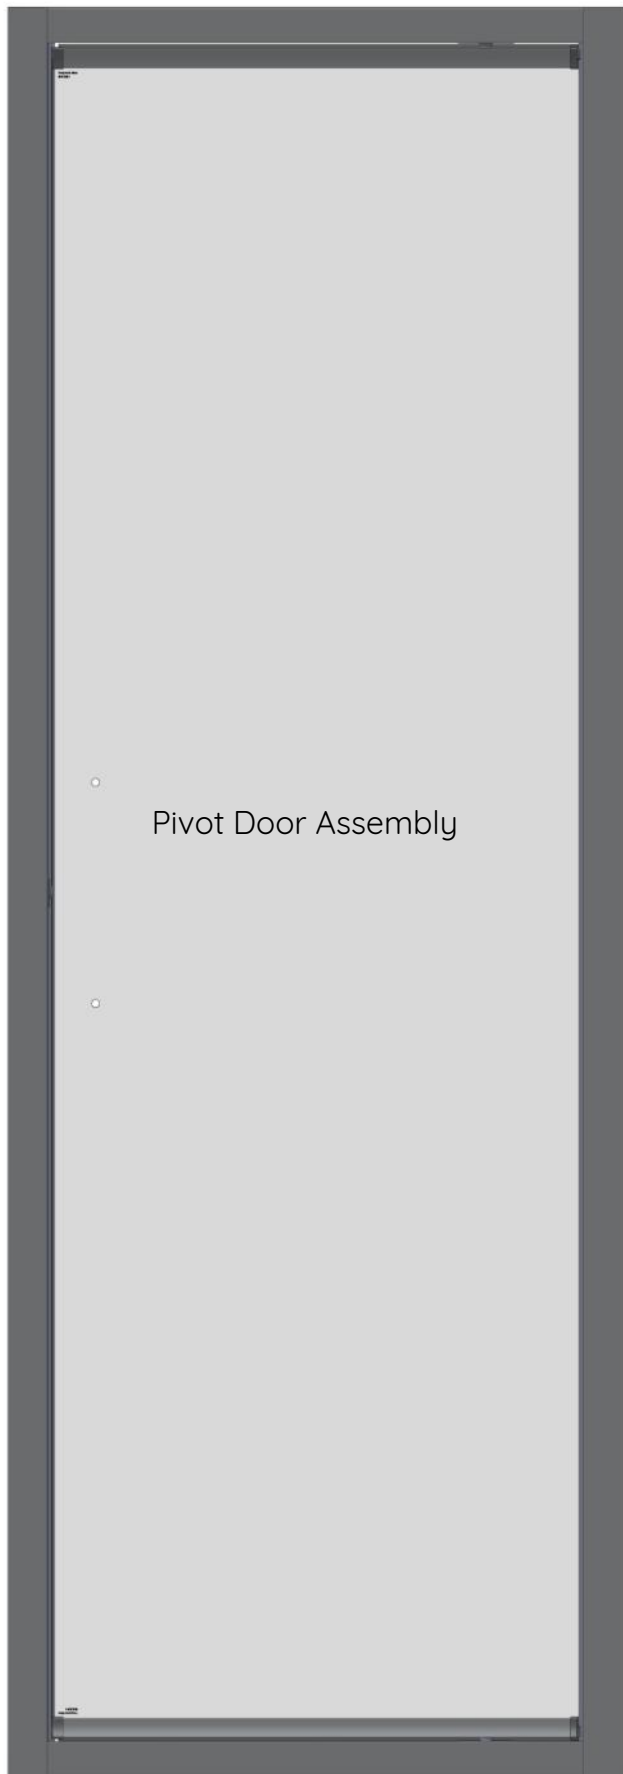


wall side
See fig D

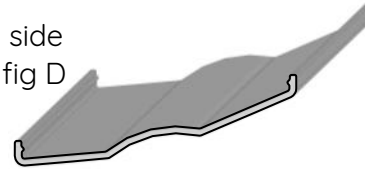

Cover Section
2x



Top Cap (vertical frame)
2x




Top Cap (wall profile)
2x (handed pair)



4 x 45 pan head self tapping
screw 8x



3,5 x 10 pan head self tapping
screw 8x



Wall Plug 8x

SIZE	Adjustment Range A
700 (070)	660—720mm
750 (075)	720—780mm
800 (080)	760—820mm
900 (090)	840—900mm
1000 (100)	940—1000mm



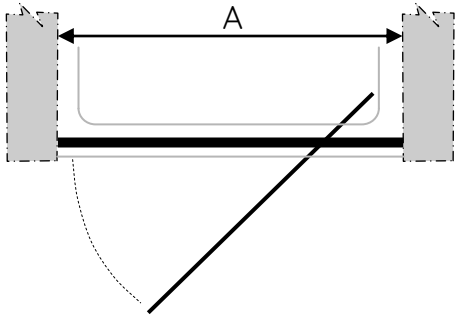




Diagram showing the adjustment range A for the enclosure size.


Tools Required



Tape Measure



Spirit Level (with vertical 'bubble')



Pencil


3mm HSS drill bit


Pozidriv Screwdriver



3mm Hexagon (Allen) Key


Power drill & 8mm masonry bit

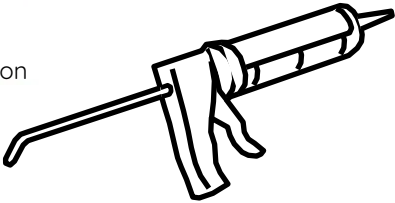
Good quality silicone sealant & applicator


Pivot Door is fully reversible, so suitable for fitting with hinge to left or right hand side of enclosure. Ensure tray is correctly levelled & that all tray/wall joints are sealed & cured over entire length of tray sides (See - - - - Fig A) prior to fitting enclosure.
DO NOT SEAL BASE / WALL EDGES UPTO A FITTED ENCLOSURE !

(A) AFFIX WALL PROFILE

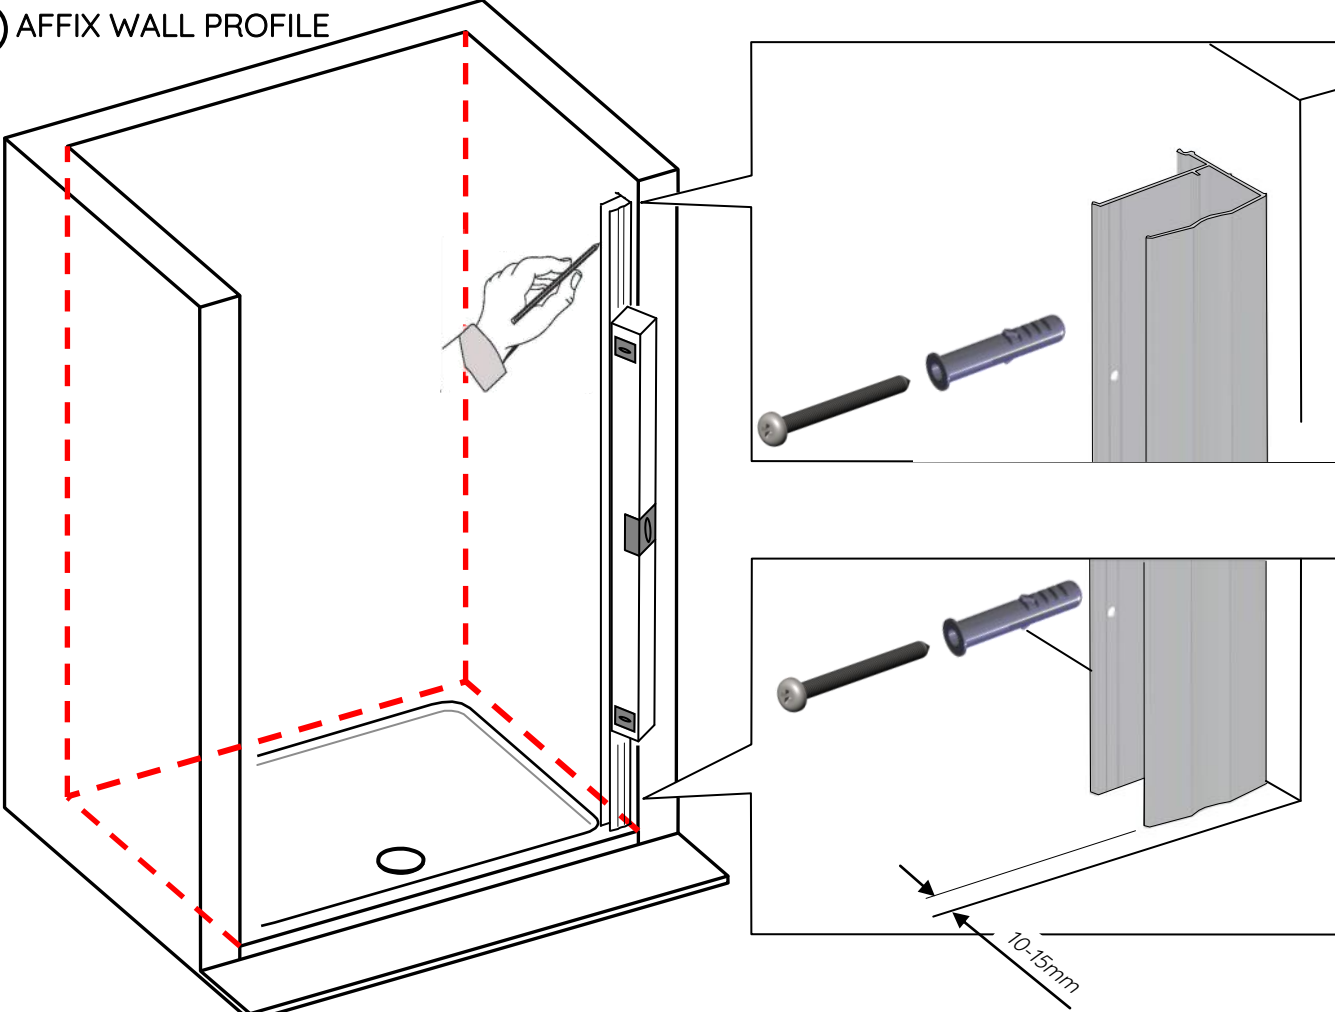

Wall profile orientation : Mounting holes to inside (wet area).
 Measure, plumb & mark wall profile positions, drill, plug & affix 1 wall profile only at this time.



Ⓑ INSERT DOOR

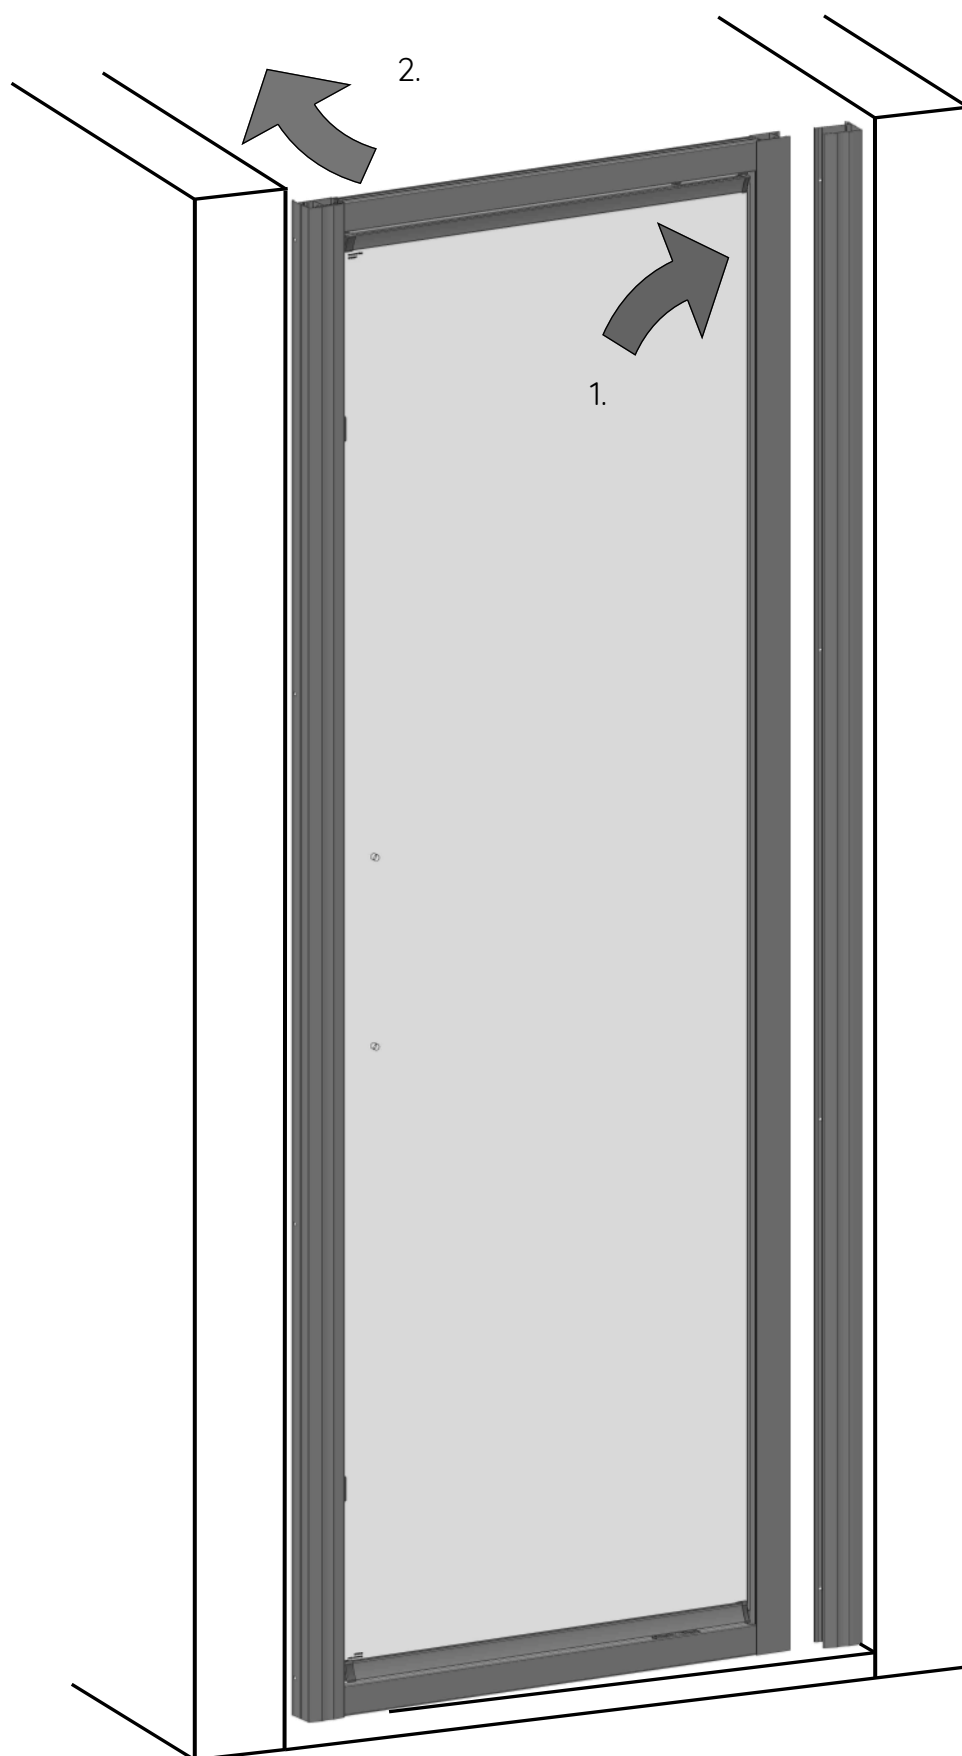

With 2nd wall profile fitted to frame:


1. Carefully lift door onto tray & push into fixed wall profile.
2. At loose side, push back, re-align & affix wall profile to wall using 4 x 45 long screws.

© PLUMB, AFFIX FRAME & DOOR HANDLE.

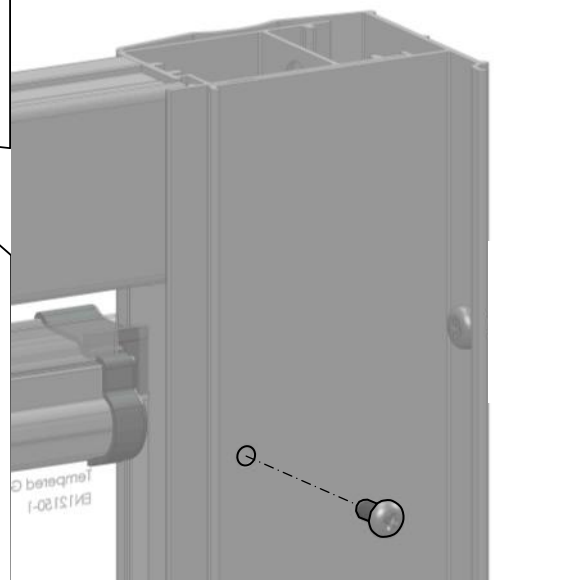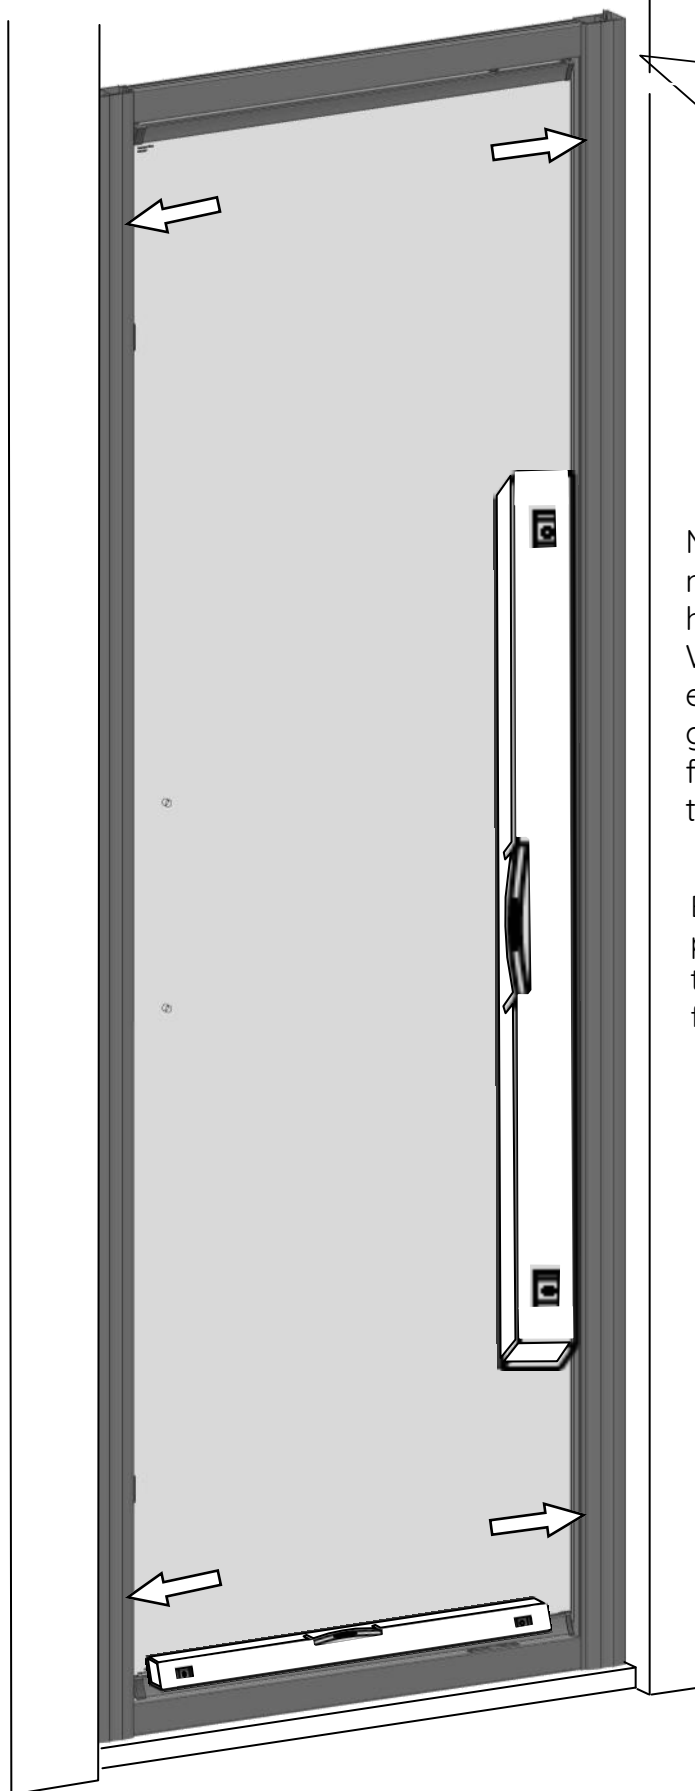

Manipulate & centralise frame in wall mounts until plumb (check vertical & horizontal frame members).
With frame in desired position, from inside enclosure, using wall profile holes as a guide, drill dia 3mm pilot holes & affix frame to wall mounts with 4off 3,5 x 10 self tapping screws per side (8 total).

Ensure 1x plastic washer to each face of glass, pass pin through glass with flange / spigot end to front. Screw pins into inner handle, & tighten fully.

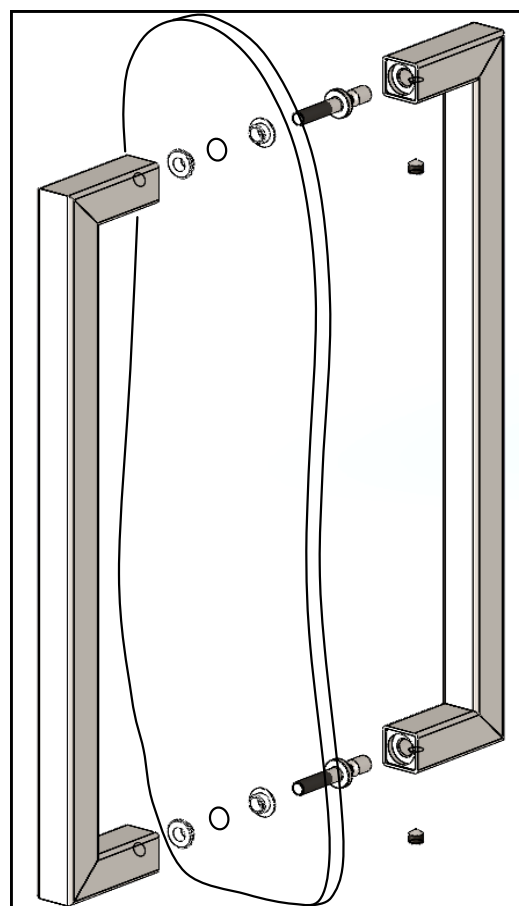

Align & push outer handle fully onto spigots & tighten grub screws to retain.



D CHECK / ADJUST LATCHING

Should door latch require adjustment, open door to 90° position. Loosen hinge screws 2 turns approx, (do not remove), adjust door hinge position as needed & re-tighten screws.

Close / re-open door to check latching & door / frame clearance.

Adjustment is available top & bottom.

After adjustment, fit hinge cover caps.

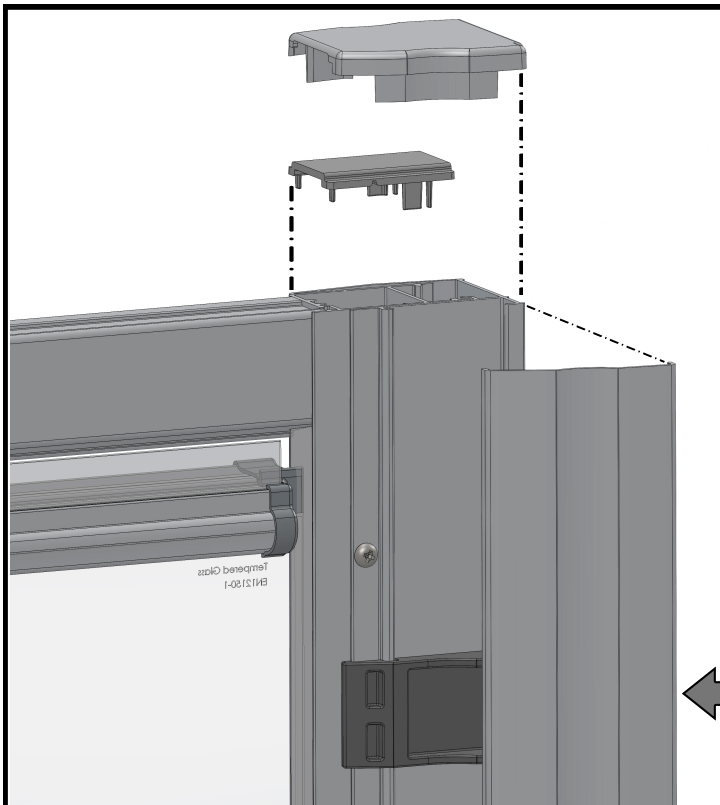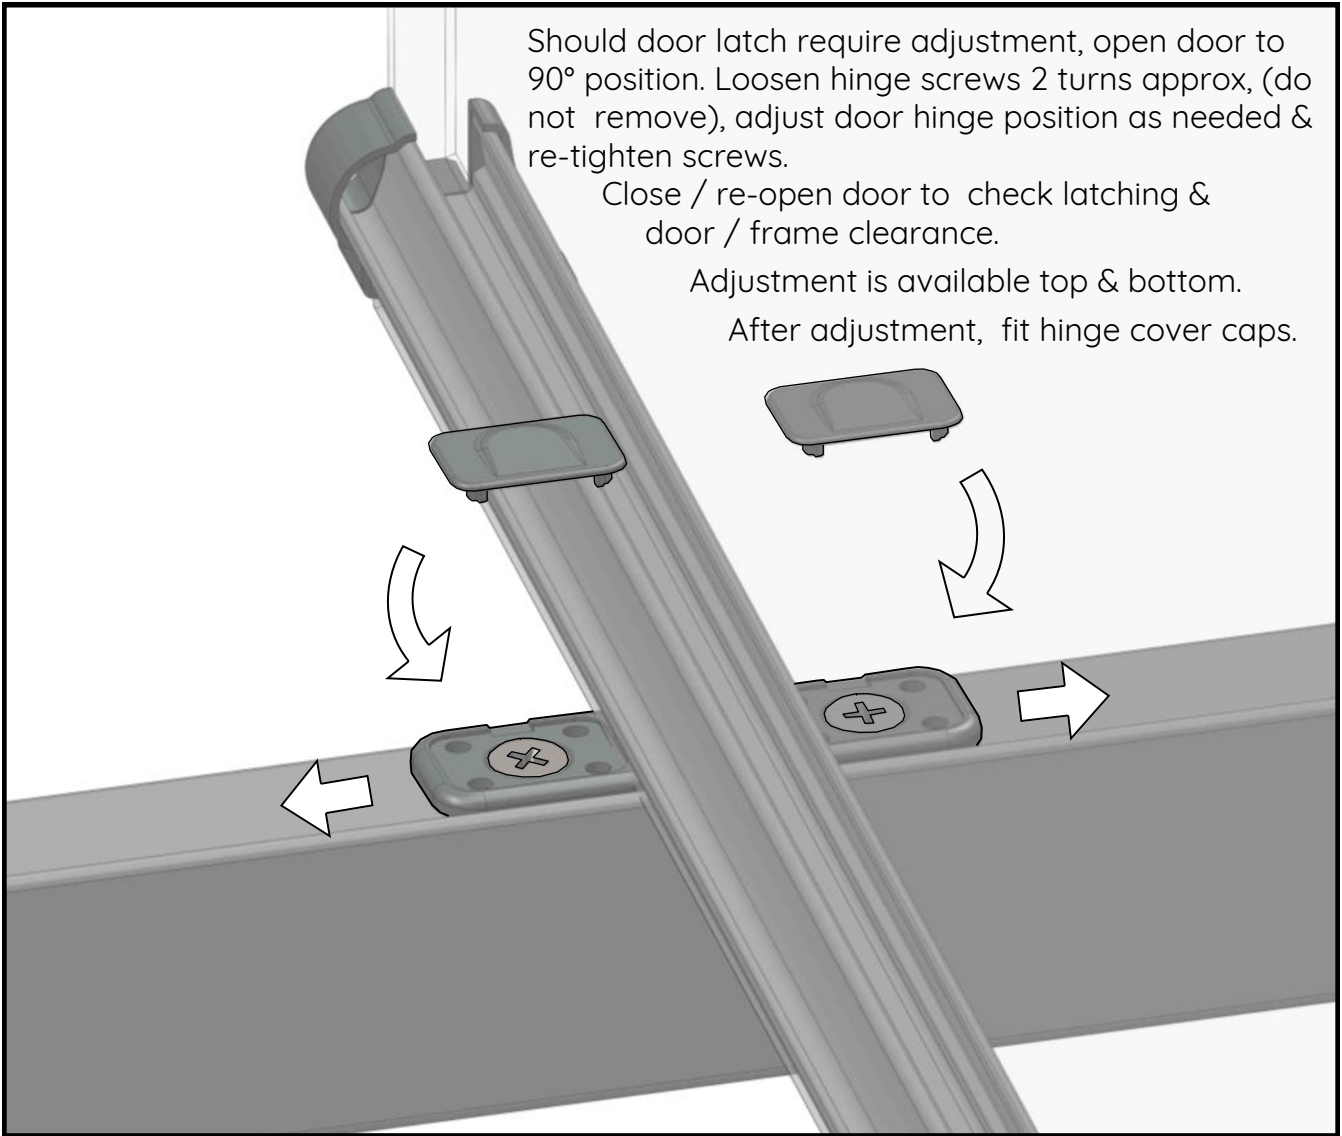


Carefully orientate cover section, & from inside enclosure, working from top to bottom, snap fit cover section onto all 5 cover clips.

Fit frame & wall profile top cover caps.

Cover Section
wall side

(E) SEALING

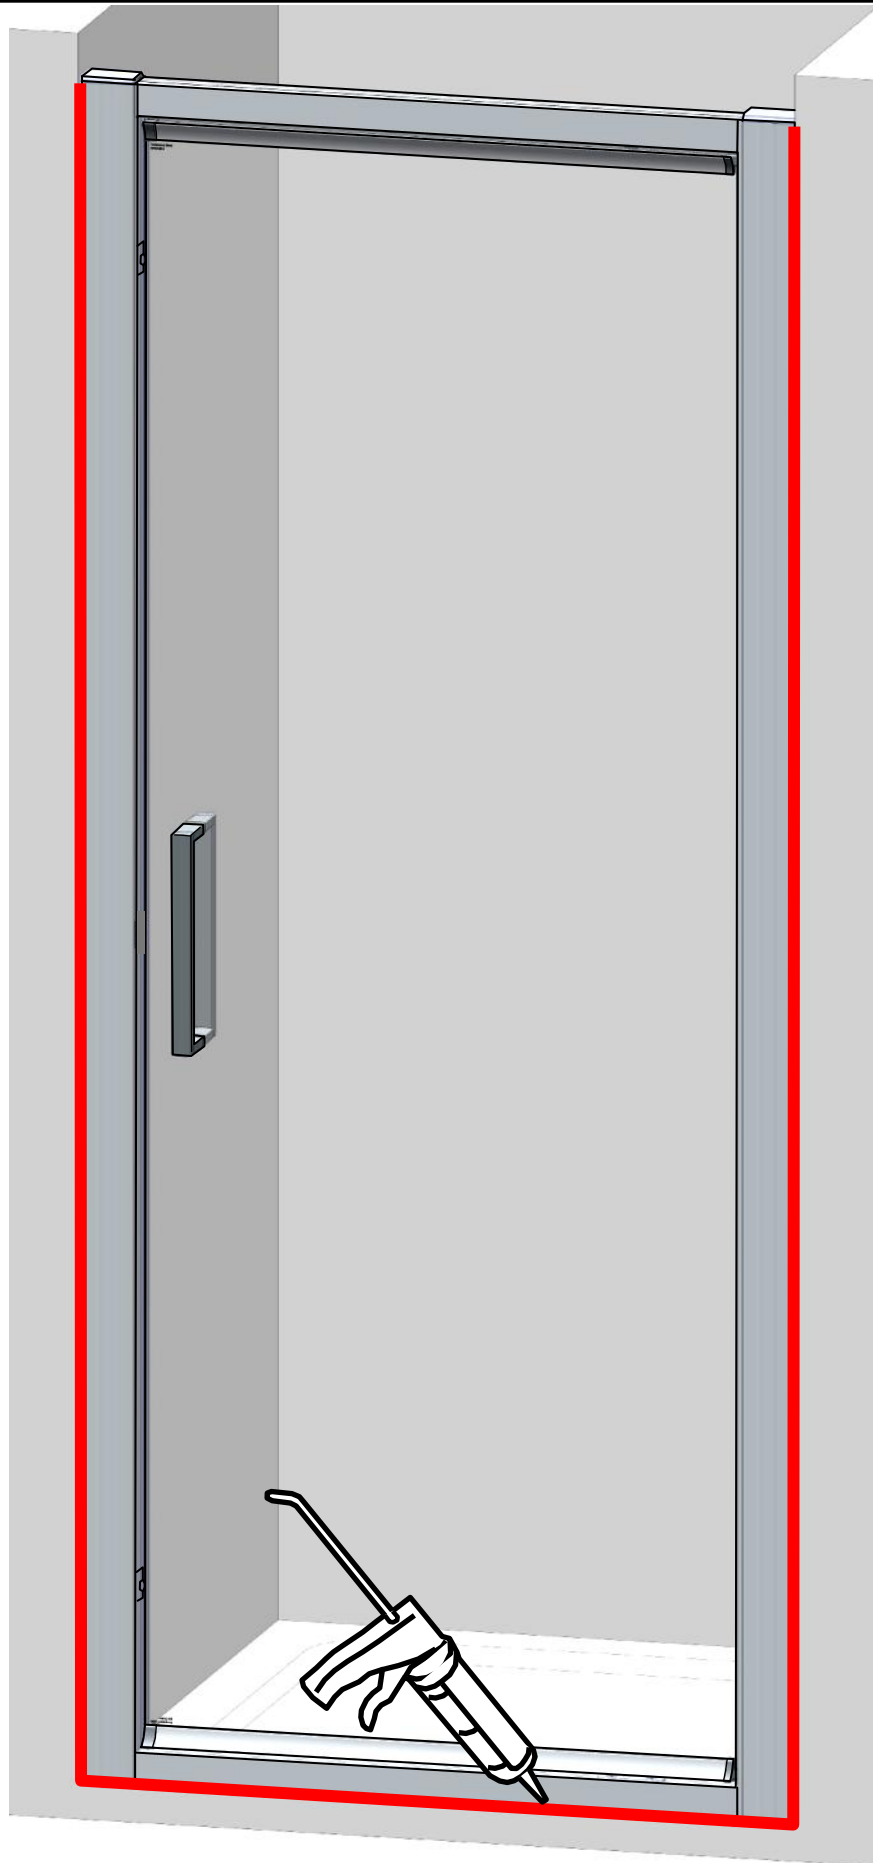

Use of good quality silicone sealant & cleaning / degreasing of all joint areas is recommended.

Apply continuous silicone sealant bead EXTERNALLY ONLY

BASIC TROUBLESHOOTING :

Leakage :

The sealing method described in these instructions relies on a continuous seal being applied between shower walls & tray before installing the enclosure (see fig A), it ensures a watertight seal around the perimeter of the enclosure to the shower walls & tray.

In the unlikely event of an enclosure leak, water will be visible on the outside of the enclosure itself, or around the perimeter joints ONLY. Water / moisture appearing outside this area (ie at floor level) is normally due to incorrect tray installation.

Door latch excessively tight, or not holding / door catching frame : adjust door toward or away from latch as necessary (see fig D). Check for smooth latch operation (press / release roller).