

- 1830mm Reduced height doors
- 6mm toughened safety glass to EN12150
- Manufactured in accordance with BS EN 14228:2015 + A1:2018
- AllClear® protective coating applied to both sides of the glass for long-lasting clarity
- 10 year warranty
- 20mm adjustment each side
- Fully reversible
- Optional side panel
- Straightforward installation
- Magnetic sealing



1830mm Bifold Door

Bifold Door Size (nominal)	'W' Adjustment	'D' Doorway	'I' Intrusion (Fully Open)	Code
750	710 - 750	505	339	6CB075
800	760 - 800	555	364	6CB080
900	860 - 900	655	415	6CB090
1000	960 - 1000	755	465	6CB100


Optional Side Panels

Sliding Door Size (nominal)	'SP' Adjustment	Code
700	660 - 700	6CSP070
750	710 - 750	6CSP075
800	760 - 800	6CSP080
900	860 - 900	6CSP090
1000	960 - 1000	6CSP100


Optional Extension Profiles

Require cutting to size on installation


Width	Code
15	ALEP15
30	ALEP



In a recess

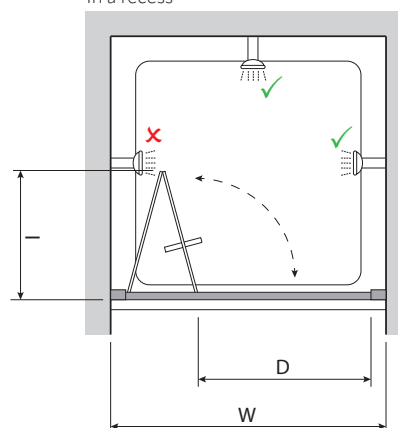

In a corner

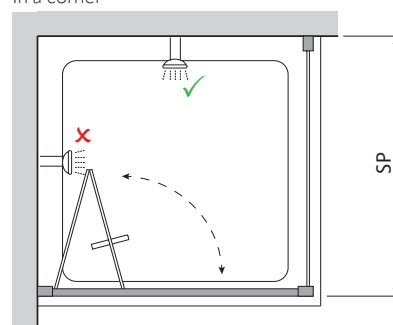

All sizes in mm