SLIDING DOOR

LAKES

6mm toughened glass to EN 12150-1

1900mm Height

AllClear® coating on both sides of glass as standard

Lifetime guarantee

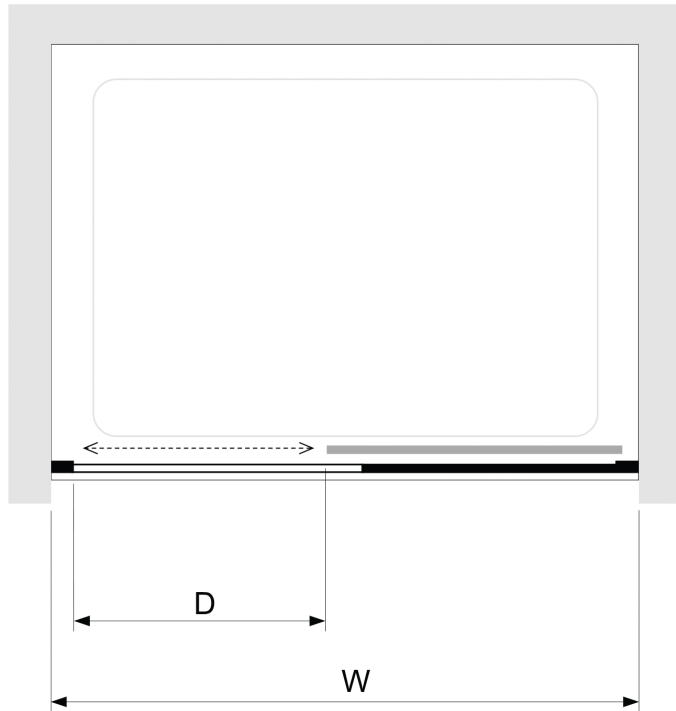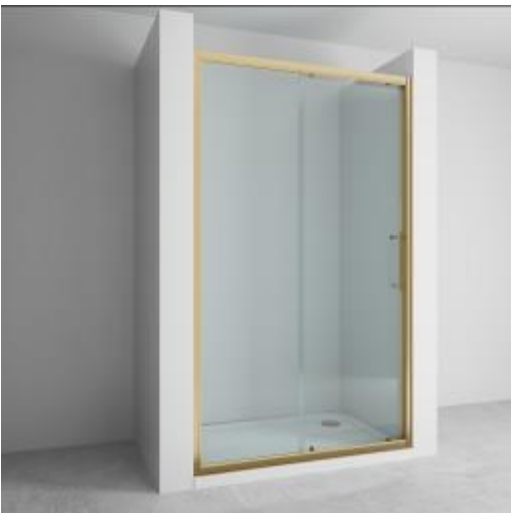Double, quick release rollers

Reversible

Optional inline and profile cover strips

Magnetic door closing mechanism.

20mm out of plumb adjustment

Extension Profiles available

Silver, black or brushed brass anodised finish per EN 12373-1

Size mm	Adjustment mm	Door Opening mm D	Code Silver	Code Black	Code Brushed Brass
1000	950 - 990	385	AS100	AS100B	AS100BRS
1100	1050 - 1090	435	AS110	AS110B	AS110BRS
1200	1150 - 1190	485	AS120	AS120B	AS120BRS
1300	1250 - 1290	535	AS130	AS130B	AS130BRS
1400	1350 – 1390	585	AS140	AS140B	AS140BRS
1500	1450 – 1490	635	AS150		
1600	1550 – 1590	685	AS160		
1700	1650 – 1690	735	AS170		

SLIDING DOOR OPTIONAL SIDE PANEL

LAKES

6mm toughened glass to EN 12150-1

1900mm Height

Frameless

AllClear® coating on both sides of glass as standard

Lifetime guarantee
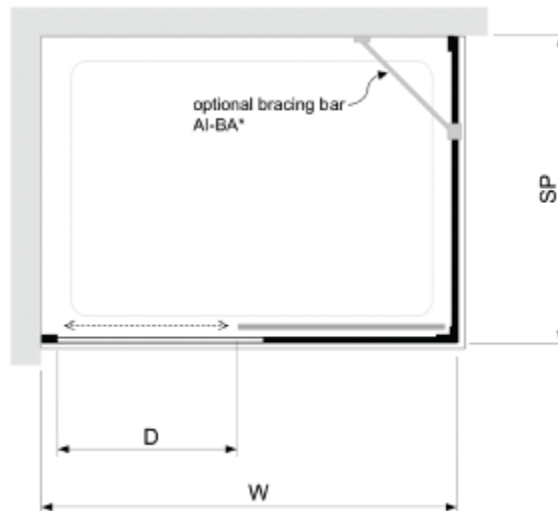
20mm out of plumb adjustment each side

Reversible

Optional inline panel and profile cover strips

Extension Profiles available

Silver, black or brushed brass anodised finish per EN 12373-1

Fully tested and conforming to BS EN 14428:2015+A1:2018

optional bracing bar
AI-BA*

SP

D

W

Size mm	Adjustment mm	Code Silver	Code Black	Code Brushed Brass
700	660 - 700	ASP070		
750	710 - 750	ASP075		
800	760 - 800	ASP080	ASP080B	ASP080BRS
900	860 - 900	ASP090	ASP090B	ASP090BRS
1000	960 - 1000	ASP100		

UK CA C E

Contact information: projects@lakesuk.com/ info@lakesuk.com

Carbon footprint standard
Carbon Neutral Organisation