


## SIDE PANEL Installation & Maintenance Instructions

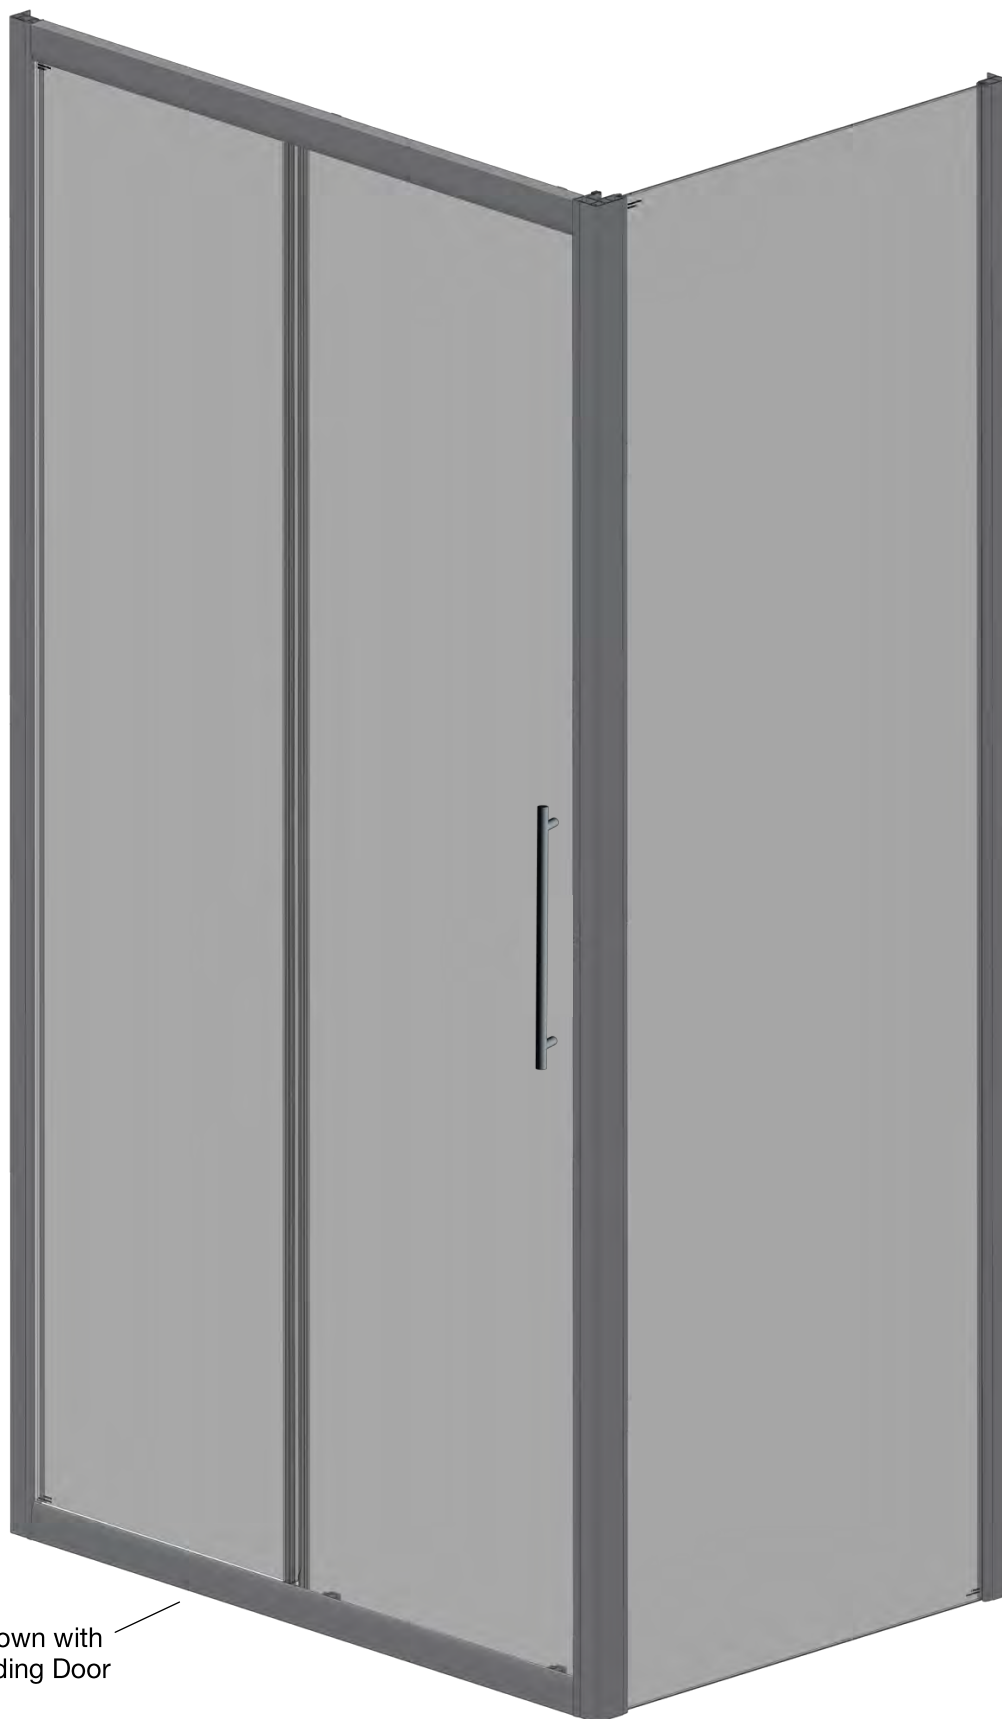

Shown with  
Sliding Door

## **Important Notes :**

Please Read Carefully & retain these instructions for Future Reference.

1. For ease & safety we advise that two persons assemble this product.
2. Protect shower tray surfaces at all times.
3. Check for cables, pipes etc before drilling walls.
4. Ensure all surfaces are dry, clean & free of loose debris / dust.
5. Unpack goods with care (small parts can become lodged in packaging & inadvertently discarded). Check parts supplied against parts & fittings listed herein. Damaged parts / omissions may be resolved by calling Helpline.
6. Whilst precautions are taken in manufacture, care must be taken when handling as rail ends may have sharp edges.
7. Before commencing, check :
  - a) shower tray is level & completely sealed to finished / tiled walls.
  - b) finished walls are sound & free of cracks loose tiles / grout.
8. AFTER INSTALLATION, DO NOT 'WET' ENCLOSURE FOR 48 HOURS TO ENSURE FULL CURE OF SILICONE SEALANT.

## **Use :**

### **General Care & Maintenance.**

Provided this product is installed & operated in accordance with these instructions, problems should not arise. However should maintenance be required it should be carried out by a competent person with reference to these instructions. Before any work is carried out the root cause of the problem must be identified. Service engineers are available to consult / carry out remedial work ~ call Helpline.

### **Cleaning.**

(Every one to two weeks depending on local water {hardness} conditions).

All glass panels in this product have a hydrophobic coating aiding 'runoff' of water droplets, reducing the need for frequent cleaning. For best appearance / product life however, regular cleaning is recommended.

Use ONLY mild soap / detergent solutions to clean. Rinse with water, squeegee glass panels & wipe frames dry with a soft cloth. Under no circumstances should abrasive, caustic or scouring products be used. DO NOT use 'spray & leave' type cleaning products. Non compliance with these cleaning instructions may cause plated / painted finishes to deteriorate & could adversely affect safe operation of the enclosure.

Limescale ~ should a build up of limescale occur, remove using a 50:50 solution of white vinegar & water applied with a soft cloth & rinsed / dried thoroughly afterwards.

### **Daily Care.**

To prevent the build up of limescale, do not allow water droplets to dry on glass or frames. After showering, rinse with water, remove droplets from glass with a squeegee & wipe frame with a soft cloth.

### **Customer Service.**

**Quality Guarantee :** Shower Doors & Enclosures are guaranteed against any manufacturing or material defects for the duration of the warranty. Defects will be resolved free of charge by repairing or replacing parts as we feel necessary. To be 'free of charge' service work must be carried out by approved agents. Call Helpline.

**Not Covered by this Guarantee :** Damage or defects that result from improper installation, improper use, or lack of maintenance (including limescale buildup). Damage or defects that result from repairs or modifications undertaken by unauthorized persons.

This guarantee is in addition to statutory & other legal rights.


**What to do if something goes wrong :** Should the product not function correctly on initial use, firstly, contact the installer to check that unit installation & commissioning are in accordance with these instructions. Should this not resolve difficulties or should performance decline, consult 'Troubleshooting' section to see if simple home maintenance is needed.

Alternatively our Helpline staff can assist, or if necessary arrange for a service engineer to visit.


**Spares :** We maintain extensive spare part stocks. Spares can be ordered / purchased from your retailer in the first instance. Parts will normally be dispatched within two working days from order placement.

Pro Forma invoices will be sent for cheque payments.


## Supplied Parts :

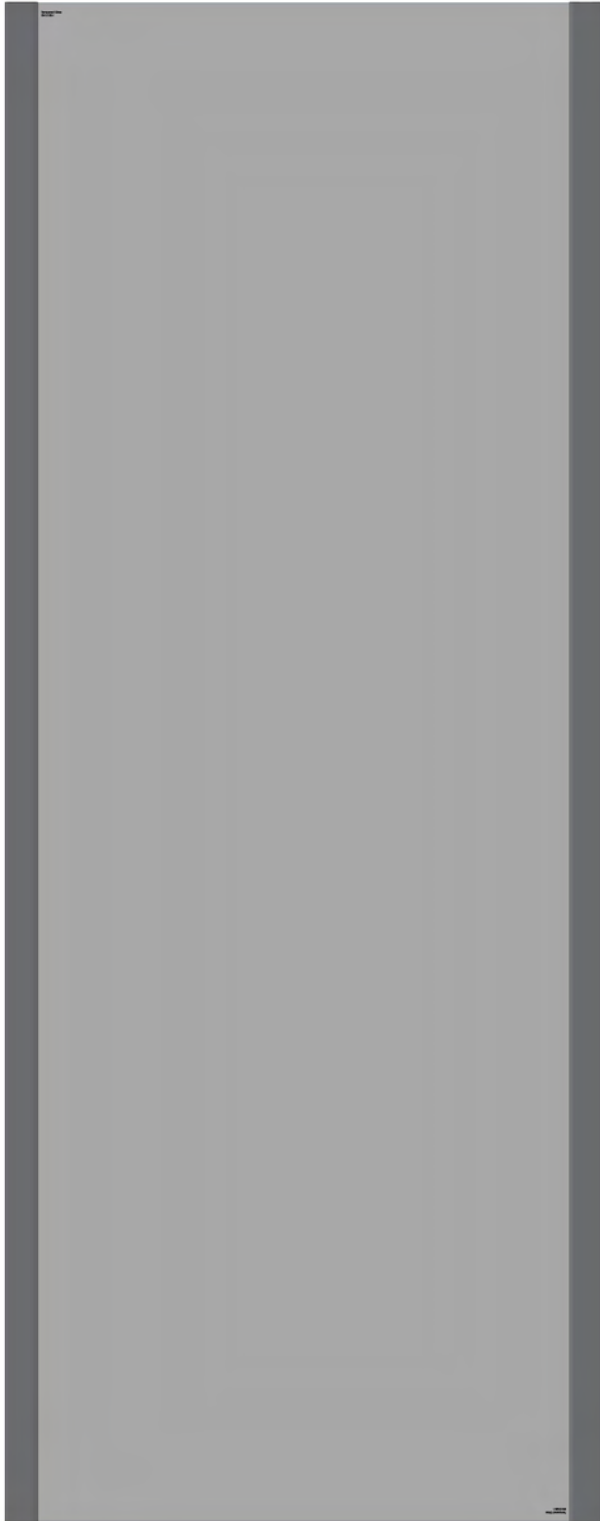


Side Panel Assembly

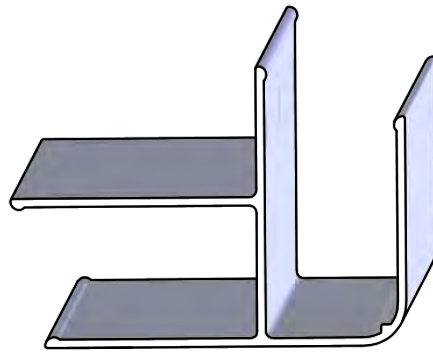

Corner Post

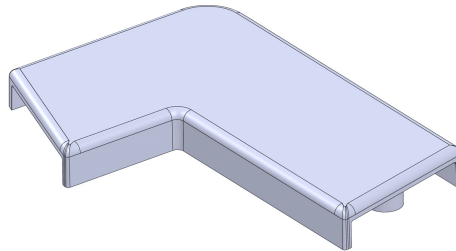

Top Cap (corner profile)  
handed pair



Top Cap (SP vert frame)  
2x



3,5 x 10 long self tapping screw 6x




Cup Washer 6x




Decorative Screw Cover Cap 6x


## Tools Required



Good quality silicone  
sealant & applicator

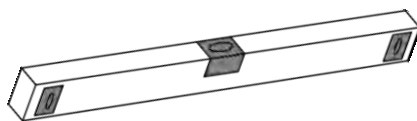

Spirit Level (with vertical 'bubble')



Tape Measure



Pencil



Pozi drive  
Screwdriver




3mm HSS  
drill bit





Power drill &  
8mm masonry bit

Standard Sizes	Adjustment Range (Dim'n A)
700mm	660—700mm
750mm	710—750mm
800mm	760—800mm
900mm	860—900mm
1000mm	960—1000mm

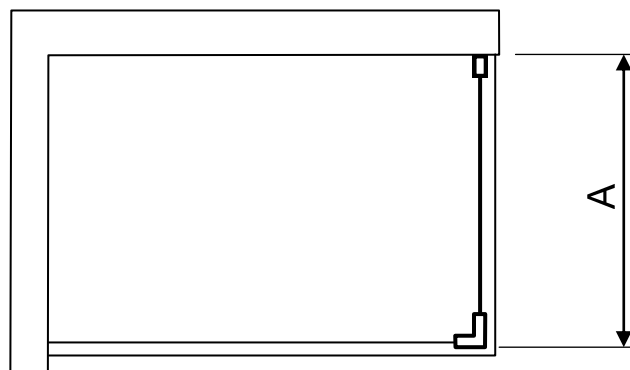


Side Panel is fully reversible, so is suitable for fitting to left or right hand side of door.  
Ensure tray is correctly levelled & that tray / wall (tile) joints are sealed & cured over entire length of tray sides (See Fig A) prior to fitting enclosure.  
**DO NOT SEAL TRAY EDGES UPTO A FITTED ENCLOSURE !**

(A)

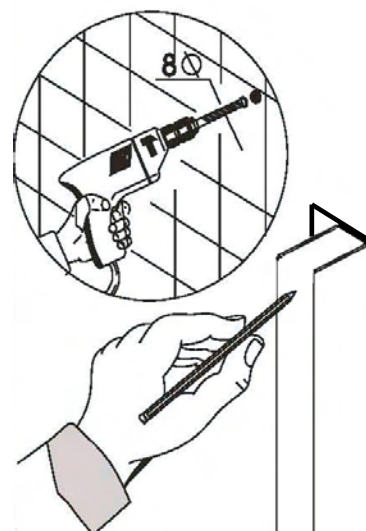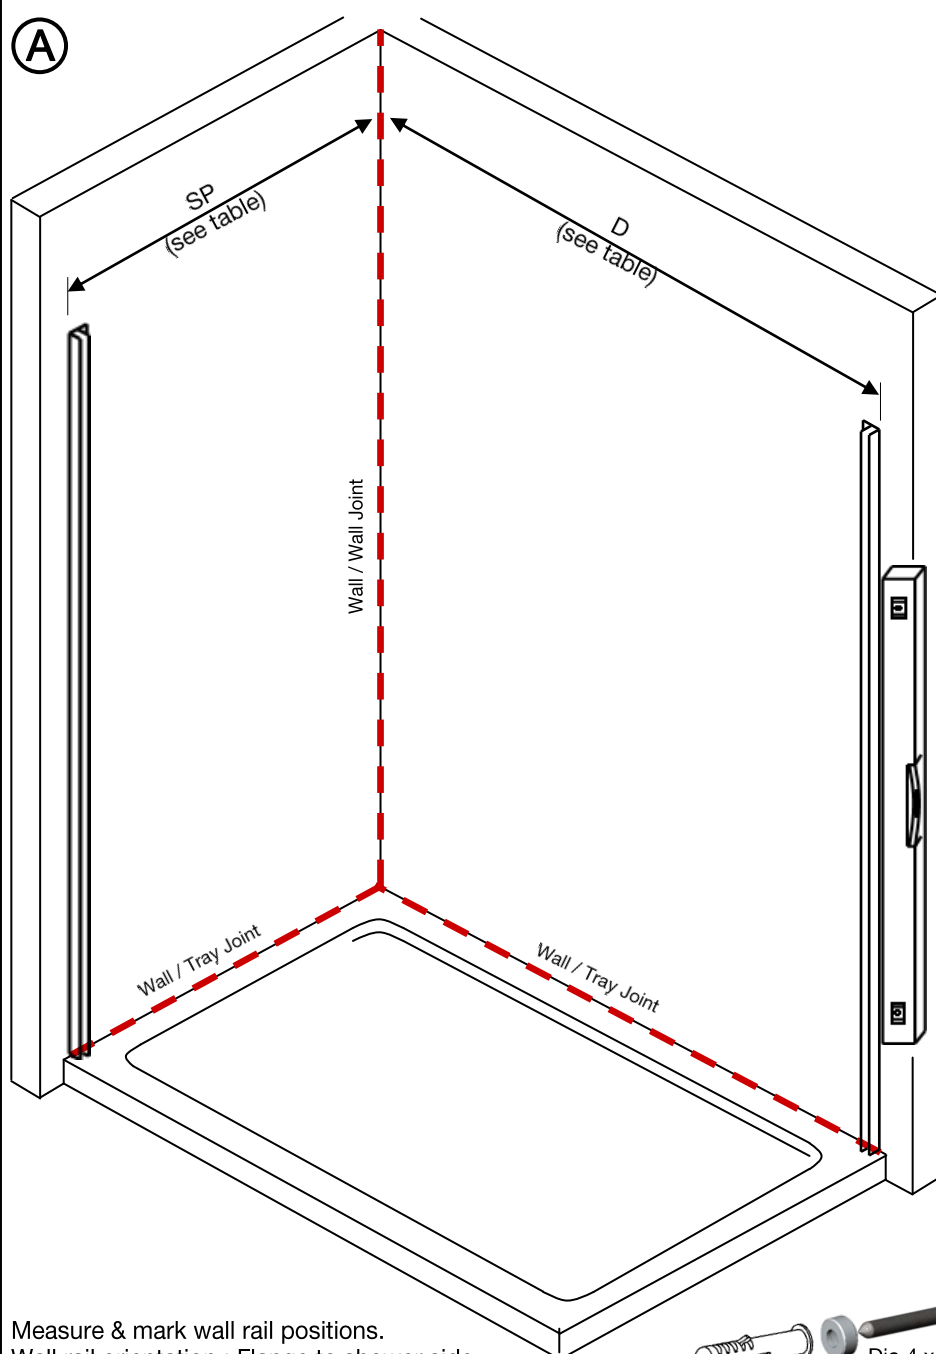


Size ref	SP (side panel)	D (door)
700	680	680
750	730	730
800	780	780
900	880	880
1000	980	980
1100	-	1080
1200	-	1180

To outside face of wall profile



Measure & mark wall rail positions.  
Wall rail orientation : Flange to shower side.  
Mark fixing hole positions, drill, plug & affix wall rails.





Ensure continuous  
silicone sealant  
bead before fitting

### Side Panel (& door) construction :


(B)

Refer to respective shower door installation instructions for assembling door.

Door should be positioned loosely in its wall profile as shown ~ DO NOT drill & screw until final unit position has been determined (refer to fig C).

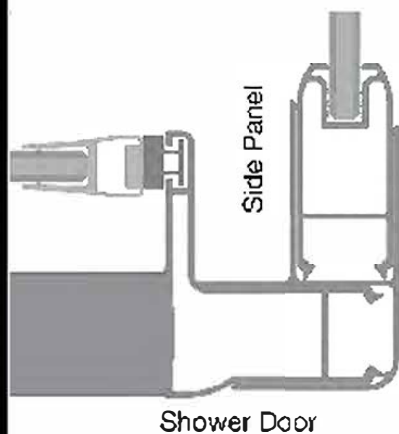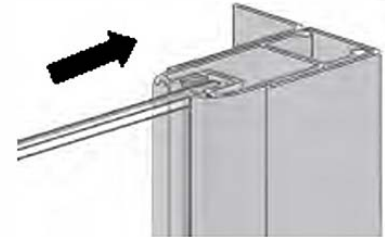


To ensure correct sizing, fit corner post such that side panel sits behind shower door as indicated. Door & Panel may be moved as shown to assist assembly.

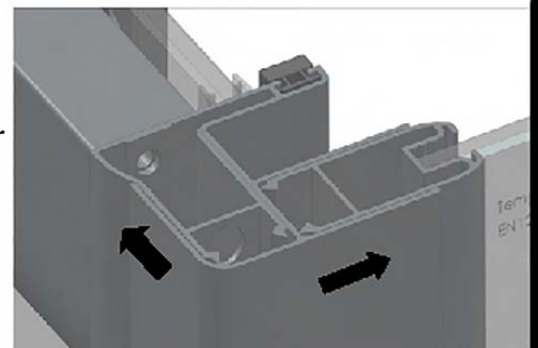


## Main Frame Setup :

©

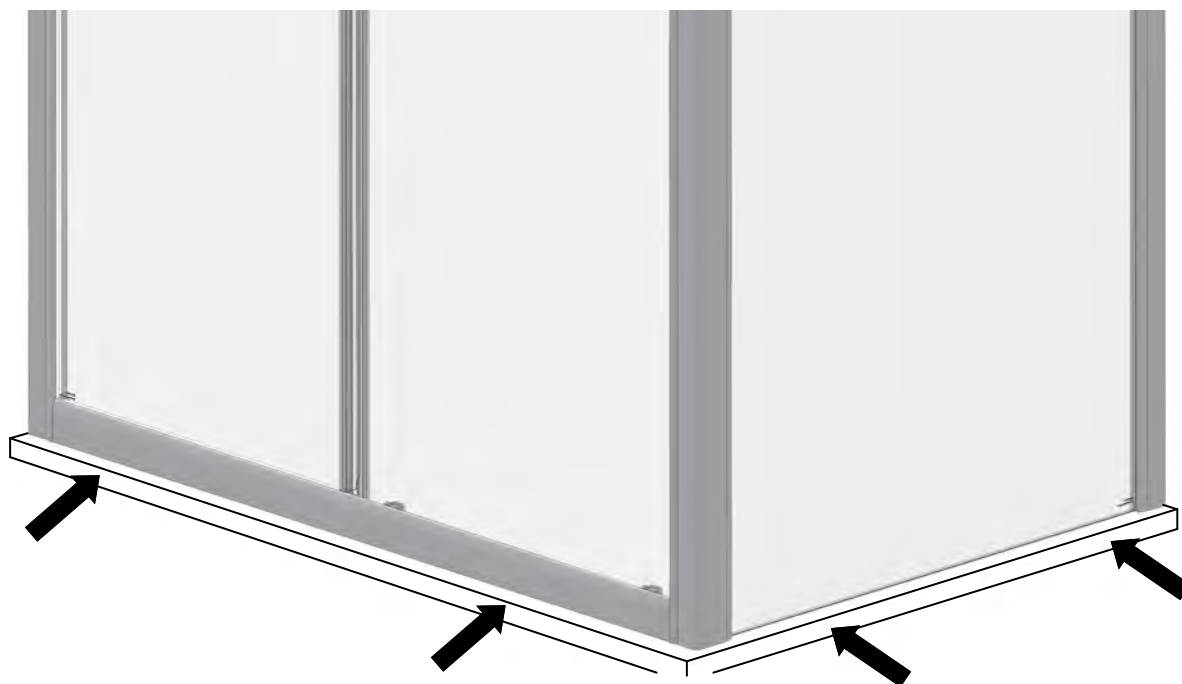


Adjust door & side panel until desired position (sides parallel to tray edges) is achieved & enclosure is 'plumb'. Ensure that shower door functions correctly. From inside enclosure, using wall rail & corner post holes as a guide, drill (dia 3mm) & screw enclosure together using 3.5 x 10 long pan head screws & washers (12 places) in total, then fit decorative screw cover caps to all washers (including wall screws).

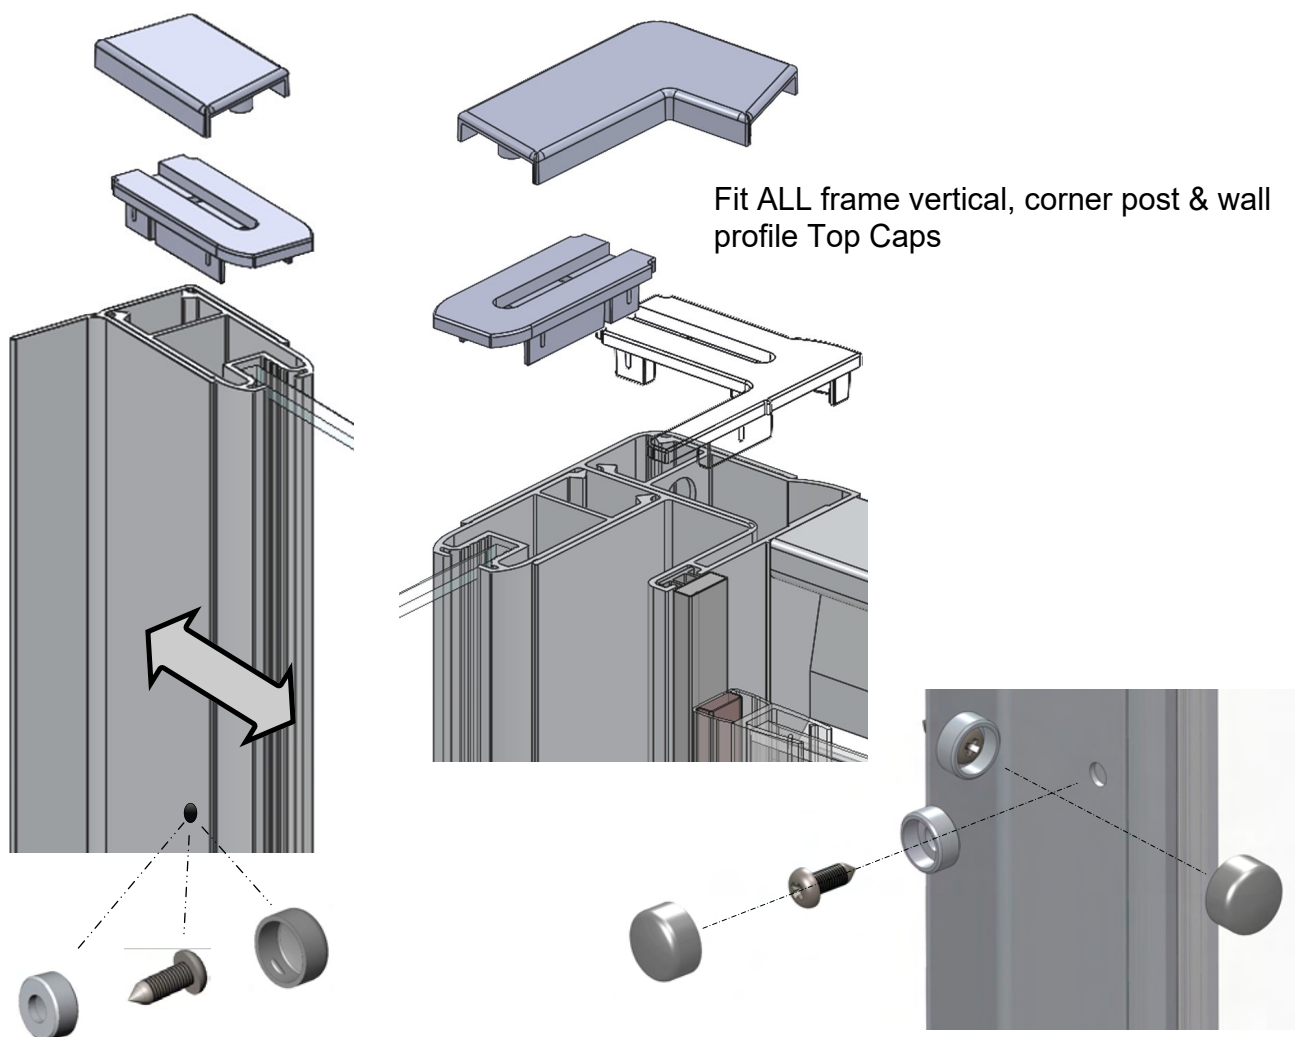

Sealing :

Ⓓ

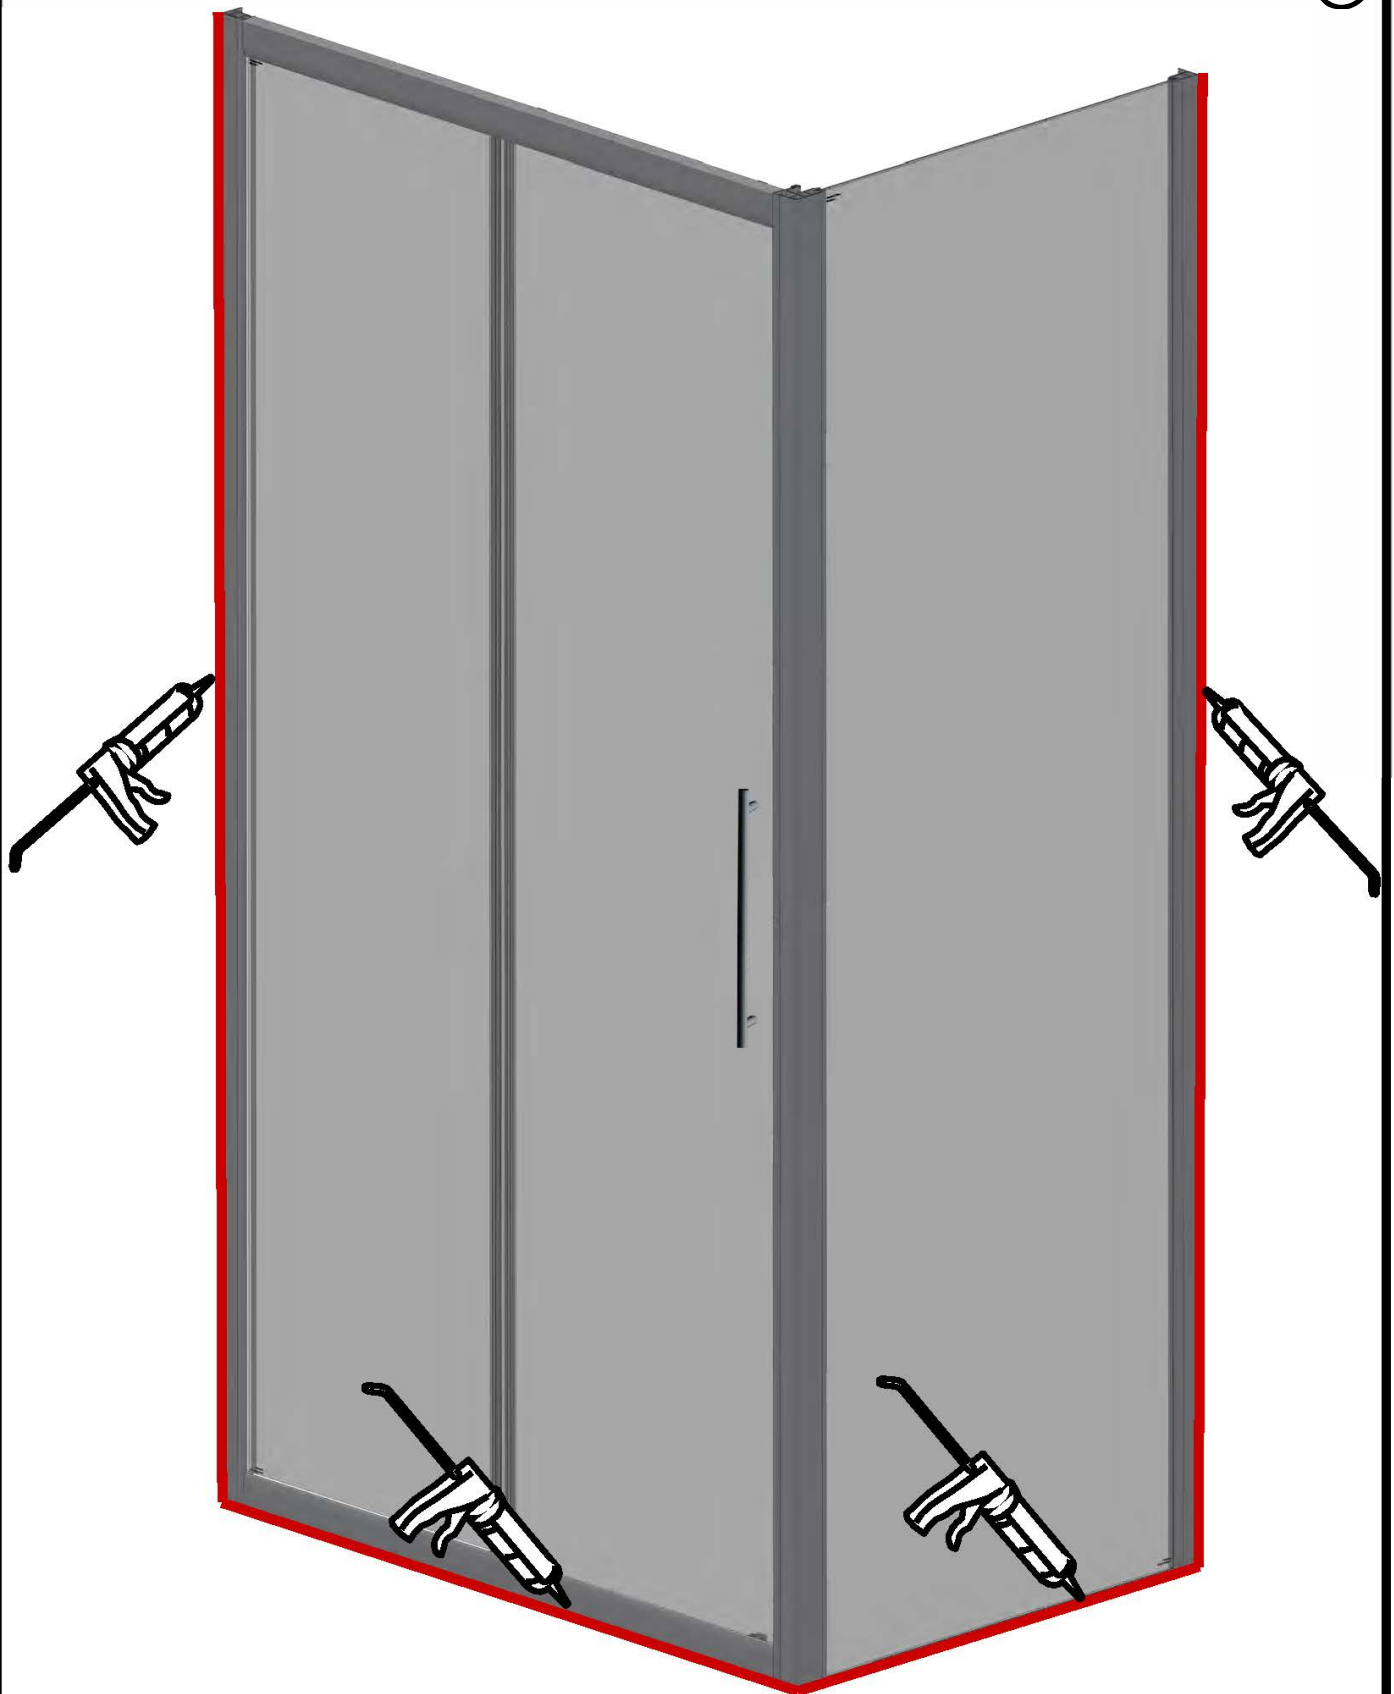

Use of good quality silicone sealant & cleaning / degreasing of all joint areas is recommended.  
Apply continuous silicone sealant bead as indicated EXTERNALLY ONLY

## **Basic Troubleshooting :**

Refer to respective shower door installation instructions for troubleshooting information.

### **Leakage :**

The sealing method described in these instructions relies on a continuous seal being applied between shower walls & tray before installing the enclosure (see fig A), it ensures a watertight seal around the perimeter of the enclosure to the shower walls & tray.

In the unlikely event of an enclosure leak, water will be visible on the outside of the enclosure itself, or around the perimeter silicone seal ONLY. Water / moisture appearing outside this area (ie at floor level) is normally due to incorrect tray installation.